



Lapis
SALICE

Index



Lapis • Silentia+ • Series 200 for thicker doors • 94° opening

page 4

Lapis • Silentia+ • Series 700 • 110° opening

page 6


Lapis with Push system • 94° opening

page 8



Plates

page 10

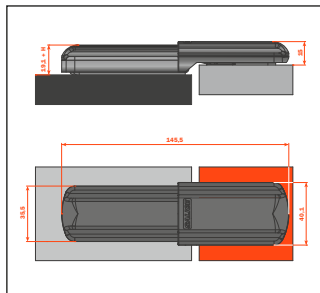

Hinge overall dimensions and size

page 11



Assembly and disassembly instructions

page 12



Finishes

page 15



Technical information

Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup. The decelerating effect is adjusted by using a simple switch.


Hinges for min. 18 mm thick doors.
15.5 mm deep cup.

94° opening.

Possible drilling distance on the door (K): from 3 to 9 mm.

Adaptable only with longitudinal Domi snap-on mounting plates (BAP).

Space needed to open the door

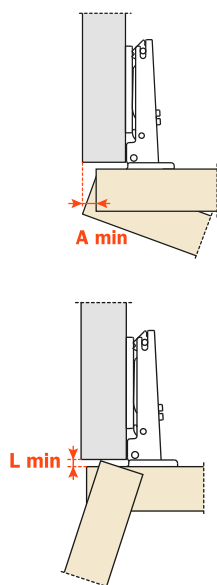

T=	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
K=3	A= 0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.6	2.6	3.5	4.5	5.4	6.4	7.4	8.3	9.3
K=4	A= 0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.2	1.9	2.8	3.8	4.7	5.7	6.6	7.6	8.6
K=5	A= 0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.2	1.4	2.2	3.1	4.1	5.0	5.9	6.9	7.8
K=6	A= 0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.2	1.4	1.7	2.6	3.5	4.4	5.3	6.2	7.2
K=7	A= 0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.1	1.3	1.6	2.1	3.0	3.8	4.7	5.6	6.5
K=8	A= 0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.5	3.3	4.2	5.1	6.0
K=9	A= 0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.5	1.8	2.1	2.9	3.7	4.6	5.4

K	3	4	5	6	7	8	9
L=	0.0	0.0	0.0	0.0	0.0	0.3	1.3

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door


Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.



“C” value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcass sides, doors or walls, whilst bearing in mind the above L · K · T values.

$$C = 23 + K + A$$

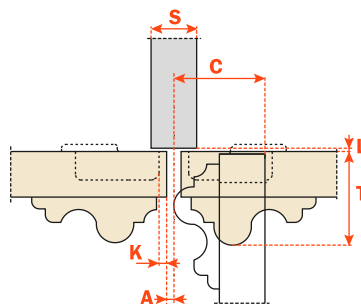


Packing

Boxes 300 pcs.
Pallets 7.200 pcs.


Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" which is necessary to solve each application problem.

Arm 0


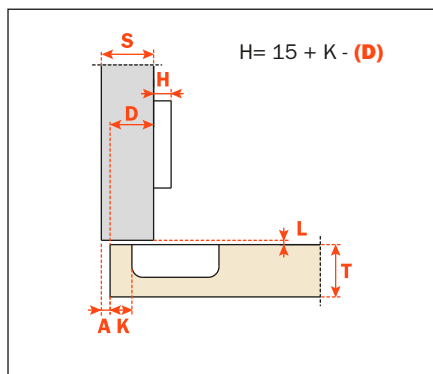


C21BAE9

Arm 9

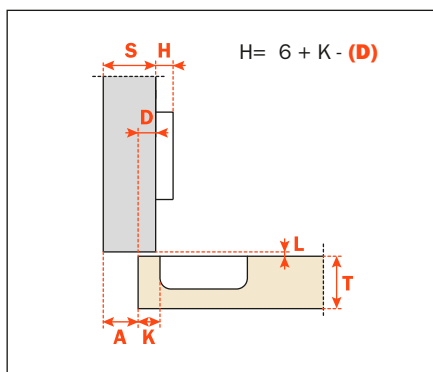

C21BGE9

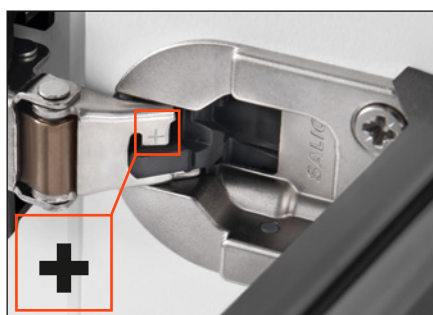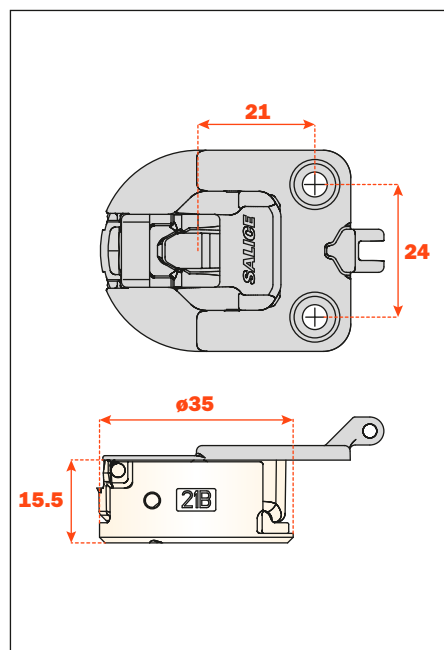



Technical information

Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup. The decelerating effect is adjusted by using a simple switch.

Hinges for min. 16 mm thick doors.


13.5 mm deep cup.

110° opening.


Possible drilling distance on the door (K): from 3 to 6 mm.

Adaptable only with longitudinal Domi snap-on mounting plates (BAP).

Space needed to open the door

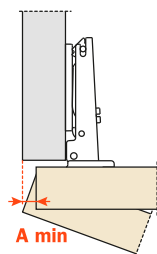

	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	A=	0.7	0.9	1.1	1.3	1.6	1.9	2.2	2.6	3.2	4.4	5.7
K=4	A=	0.6	0.8	1.1	1.3	1.6	1.8	2.2	2.5	2.9	3.4	4.7
K=5	A=	0.6	0.8	1.0	1.3	1.5	1.8	2.1	2.4	2.8	3.2	3.7
K=6	A=	0.6	0.8	1.0	1.2	1.5	1.8	2.1	2.4	2.7	3.1	3.6

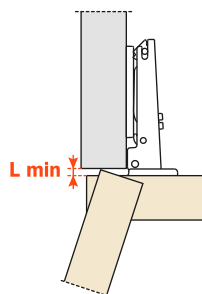


	T=	16	17	18	19	20	21	22	23	24	25	26
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.4	0.6	0.9
K=4	L=	0.0	0.0	0.0	0.3	0.5	0.7	0.9	1.1	1.4	1.6	1.8
K=5	L=	0.6	0.8	1.0	1.2	1.5	1.7	1.9	2.1	2.4	2.6	2.8
K=6	L=	1.5	1.8	2.0	2.2	2.4	2.7	2.9	3.1	3.3	3.6	3.8

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door


Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.

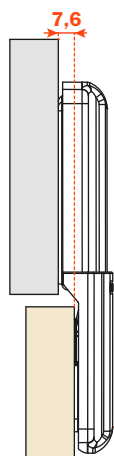

“C” value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcass sides, doors or walls, whilst bearing in mind the above L · K · T values.

$$C = 22.5 + K + A$$

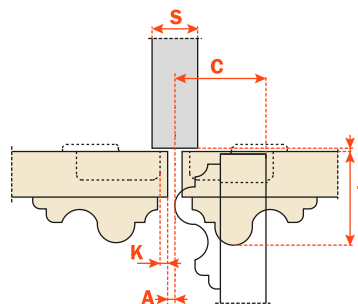


Packing

Boxes 300 pcs.
Pallets 7.200 pcs.


Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" which is necessary to solve each application problem.

Arm 0


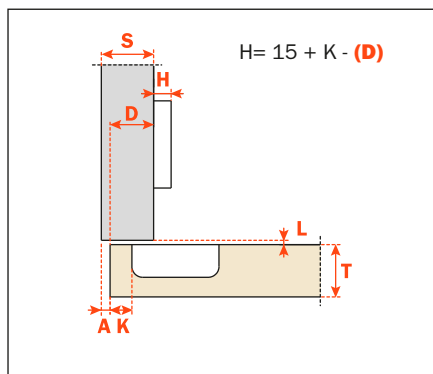


C716AE9

Arm 9

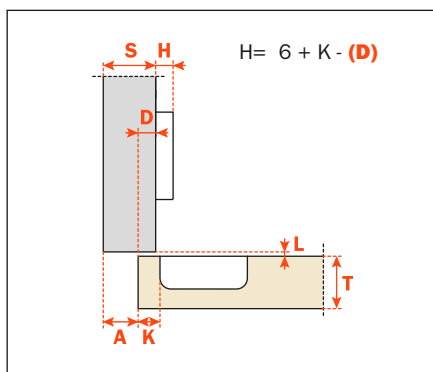

C716GE9

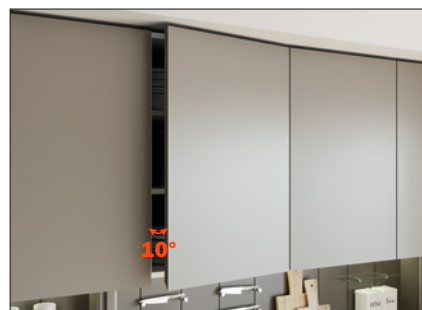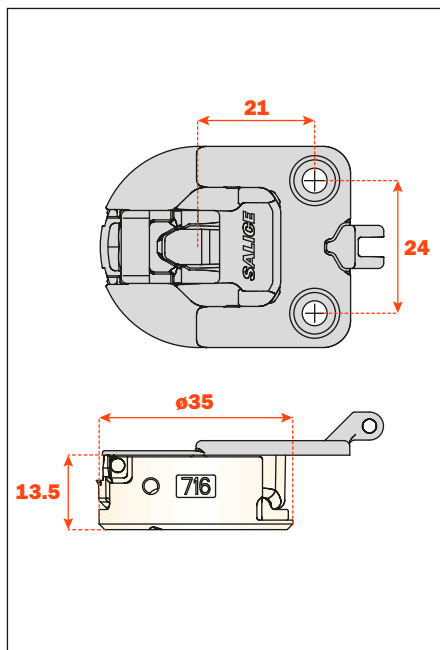



Technical information

Push hinges are equipped with a special spring that acts to open the door independently of the release device.

For thick doors up to 35 mm, with special profiles.


11 mm deep metal cup.

94° opening.


Possible drilling distance on the door (K): from 3 to 9 mm.

Adaptable only with longitudinal Domi snap-on mounting plates (BAP).

Space needed to open the door

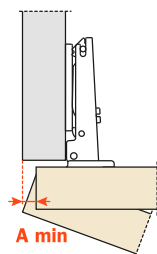

T=	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
K=3 A=	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.6	2.6	3.5	4.5	5.4	6.4	7.4	8.3	9.3
K=4 A=	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.2	1.9	2.8	3.8	4.7	5.7	6.6	7.6	8.6
K=5 A=	0.1	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.2	1.4	2.2	3.1	4.1	5.0	5.9	6.9	7.8
K=6 A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.2	1.4	1.7	2.6	3.5	4.4	5.3	6.2	7.2
K=7 A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.1	1.3	1.6	2.1	3.0	3.8	4.7	5.6	6.5
K=8 A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.5	3.3	4.2	5.1	6.0
K=9 A=	0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.5	1.8	2.1	2.9	3.7	4.6	5.4

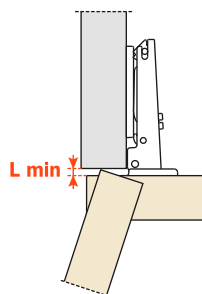


K=	3	4	5	6	7	8	9
L=	0.0	0.0	0.0	0.0	0.0	0.3	1.3

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door


Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.

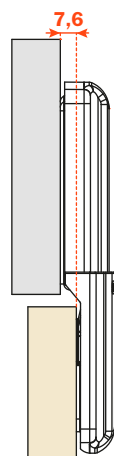

“C” value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcass sides, doors or walls, whilst bearing in mind the above L · K · T values.




$$C = 23 + K + A$$

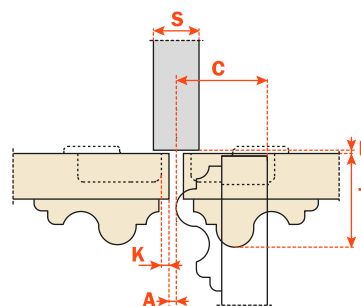

Packing

Boxes 300 pcs.
Pallets 7.200 pcs.

Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" which is necessary to solve each application problem.

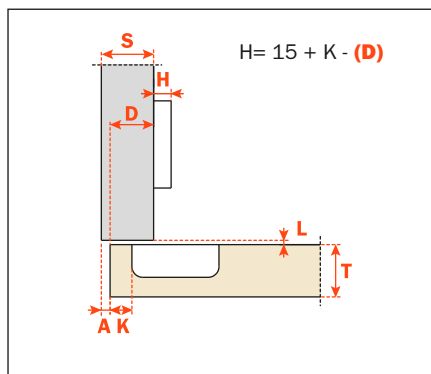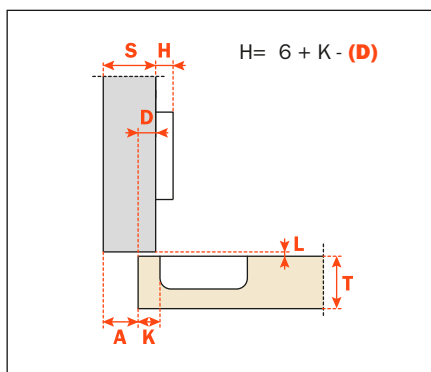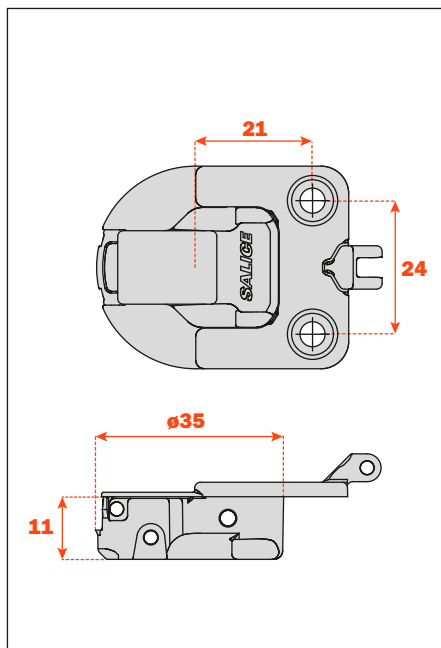Arm 0

C21VA99
Arm 9

C21VG99


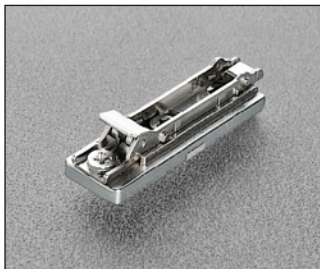
For the complete range of release devices and retaining catches consult Salice general catalogue.

Packing

Boxes 300 pcs.
Pallets 7.200 pcs.

- 21+32 mm drilling.
- Depth and height adjustment by cam.


BAP3R




Die-cast mounting plates.
Fixing: wood screw.

B 3.5 DIN 7983.

H= 0 1 2 3 4 5 6




BAPGR

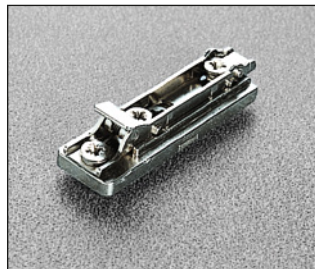


Die-cast mounting plates.
Fixing: Euroscrew.
Drilling $\varnothing 5 \times 11$.

H= 0 1 2 3 4 5 6

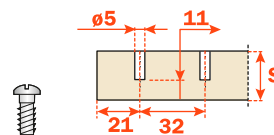


BAPMR

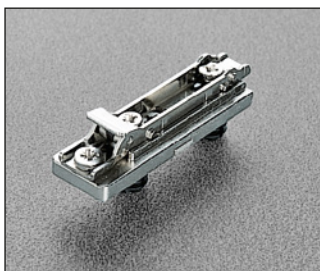

Die-cast mounting plates.
Fixing: expanding dowel.
Drilling $\varnothing 10 \times 11.5$ mm.

H= 0 1 2 3 4 5 6

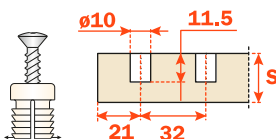


BAP7R



Die-cast mounting plates.
Fixing: knock-in dowel.
Drilling $\varnothing 10 \times 11.5$ mm.

H= 0 1 2 3 4 5 6

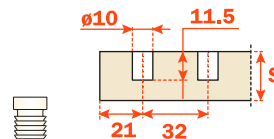


BAP3M



Steel mounting plates.
Fixing: wood screw.

B 3.5 DIN 7983.

H= 0 2 3




BAPGM



Steel mounting plates.
Fixing: Euroscrew.
Drilling $\varnothing 5 \times 11$.

H= 0 2 3

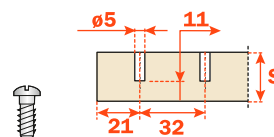



BAP7M




Steel mounting plates.
Fixing: knock-in dowel.
Drilling $\varnothing 10 \times 11.5$ mm.

H= 0 2 3

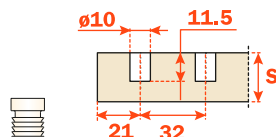


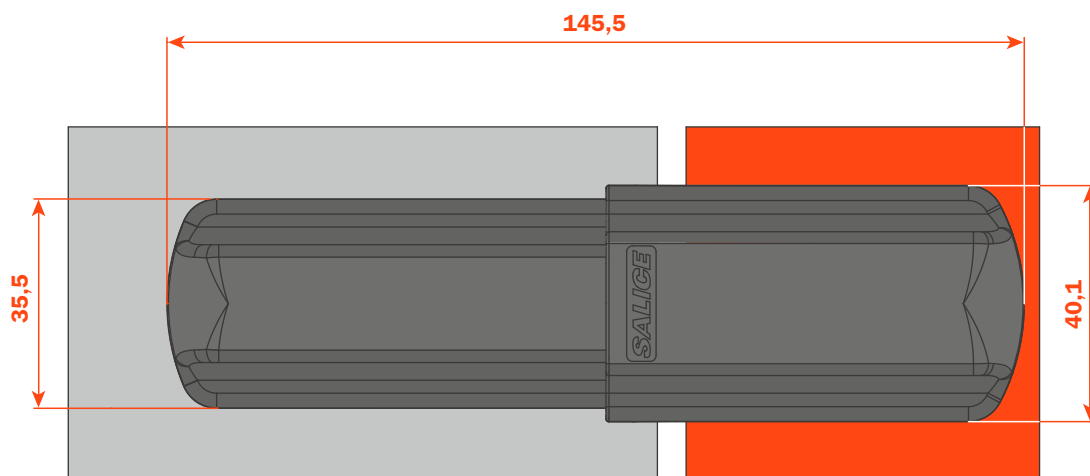

Lapis hinge • 0 arm • 0 mounting plate

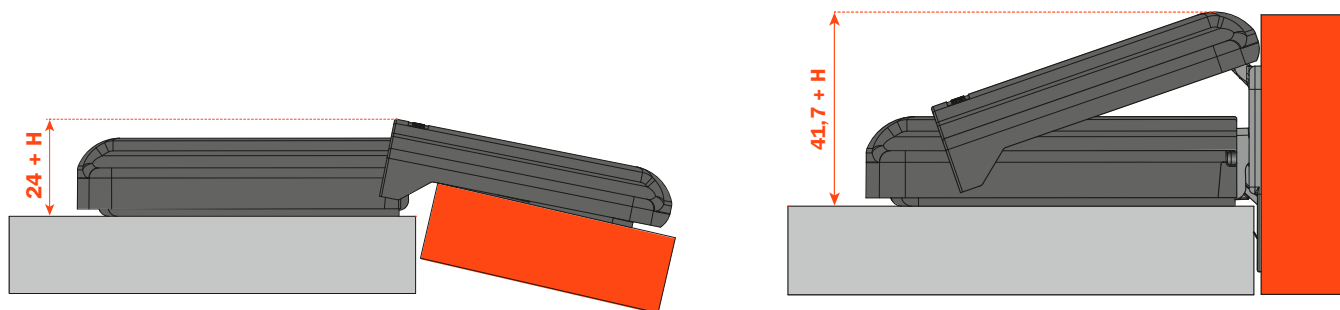

Lapis hinge • 9 arm • 0 mounting plate

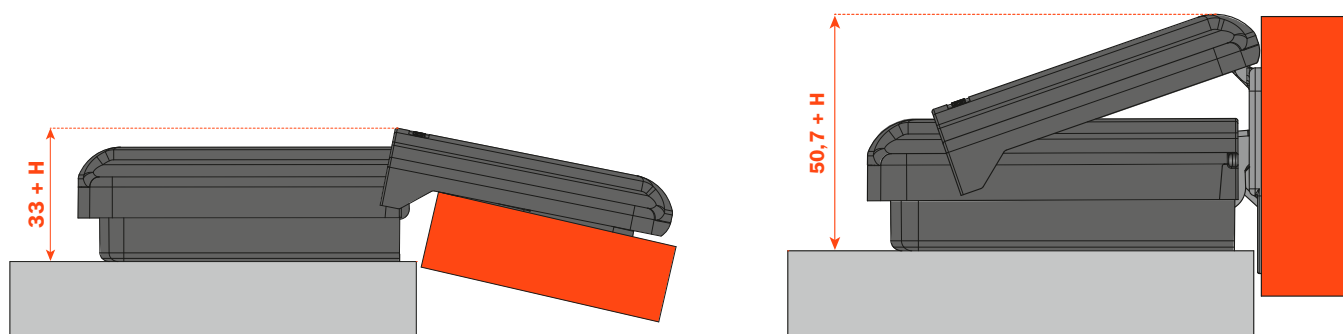


After fixing the mounting plate, attach the skirt.

Attached skirt.



Clip the hinge onto the mounting plate.

ATTACHMENT OF THE HINGE ARM COVER

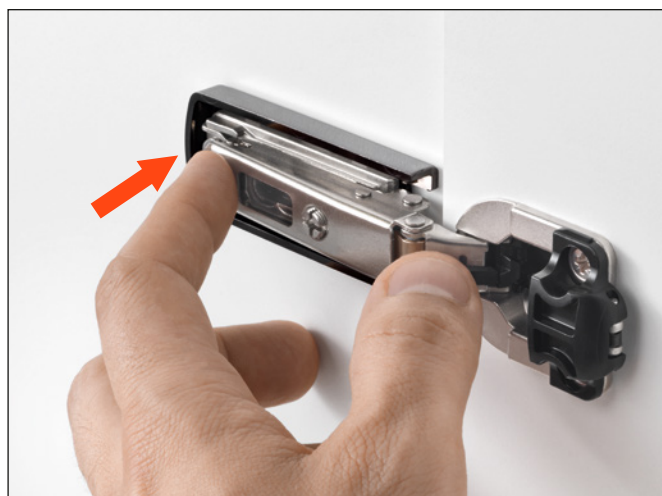

Clip the cover onto the hinge arm.


Press to clip the cover.



ATTACHMENT OF THE DOOR SIDE COVER

Lift the carrier.

Clip the cover onto the carrier.

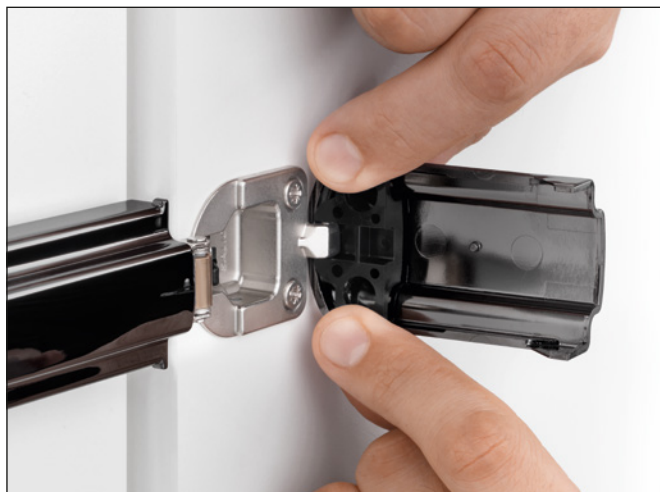

Half-close the door to ensure that the covers are engaged correctly.




Half-close the door and lift the cover.



Open the door and push the cover firmly in the direction indicated.



Remove the cabinet side cover.

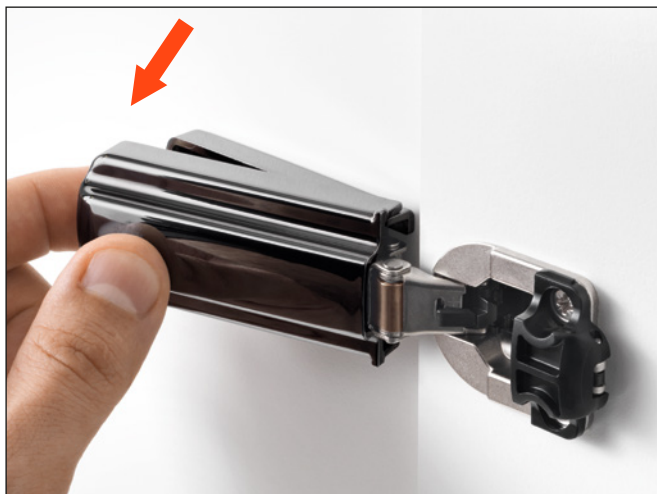

Unclip the hinge from the mounting plate.




Remove the skirt.




P7A0A09
SATIN CHROME

Lapis cabinet side · Arm 0

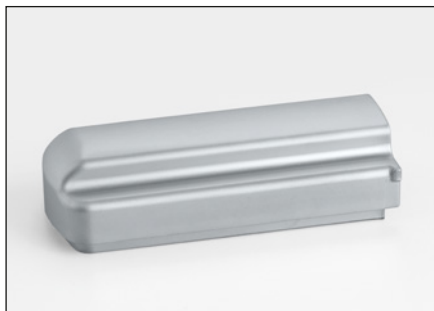

P7A9A09
SATIN CHROME

Lapis cabinet side · Arm 9

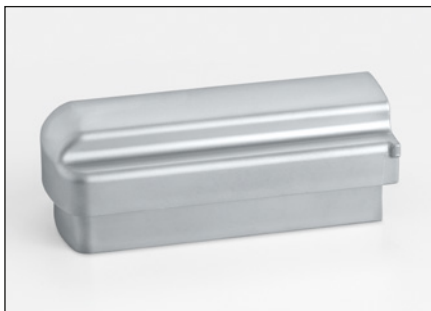


P7SXA09SN
SATIN CHROME

Lapis door side



P7A0A10
SATIN METAL BLACK

Lapis cabinet side · Arm 0

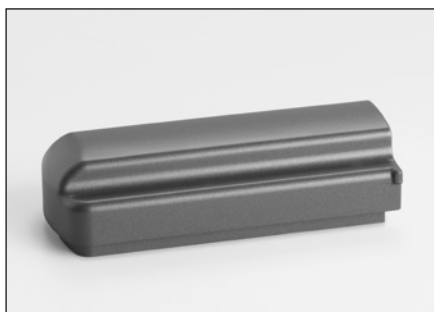

P7A9A10
SATIN METAL BLACK

Lapis cabinet side · Arm 9



P7SXA10SN
SATIN METAL BLACK

Lapis door side



P7A0A1W
SATIN GOLD

Lapis cabinet side · Arm 0



P7A9A1W
SATIN GOLD

Lapis cabinet side · Arm 9



P7SXA1WSN
SATIN GOLD

Lapis door side



P7A0A0C
CHAMPAGNE

Lapis cabinet side · Arm 0



P7A9A0C
CHAMPAGNE

Lapis cabinet side · Arm 9




P7SXA0CSN
CHAMPAGNE

Lapis door side




P7A0A06
GLOSSY CHROME

Lapis cabinet side • Arm 0

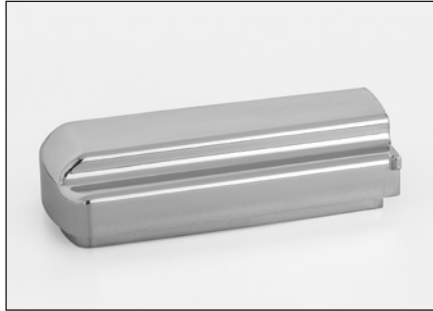


P7A9A06
GLOSSY CHROME

Lapis cabinet side • Arm 9

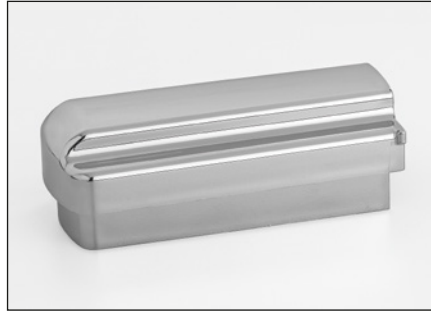


P7SXA06SN
GLOSSY CHROME

Lapis door side

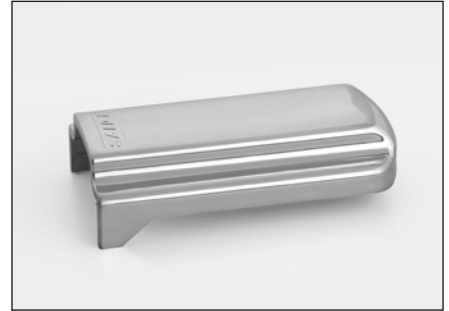

P7A0A0N
GLOSSY METAL BLACK

Lapis cabinet side • Arm 0

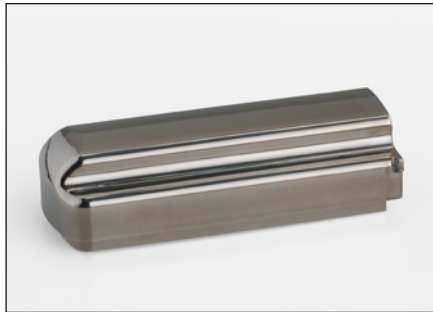


P7A9A0N
GLOSSY METAL BLACK

Lapis cabinet side • Arm 9



P7SXA0NSN
GLOSSY METAL BLACK

Lapis door side

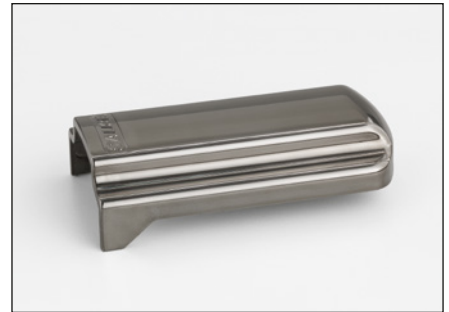

P7A0A0I
STAINLESS STEEL

Lapis cabinet side • Arm 0



P7A9A0I
STAINLESS STEEL

Lapis cabinet side • Arm 9



P7SXA0ISN
STAINLESS STEEL

Lapis door side




P7A0A05
GRAPHITE

Lapis cabinet side • Arm 0



P7A9A05
GRAPHITE

Lapis cabinet side • Arm 9

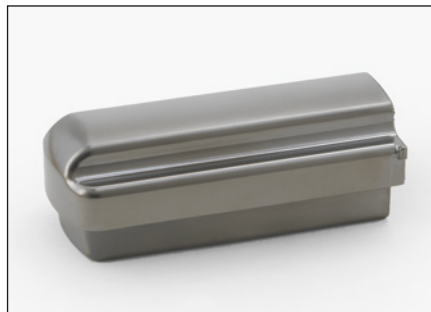

P7SXA05SN
GRAPHITE

Lapis door side



P7A0A08
GLOSSY GOLD

Lapis cabinet side · Arm 0



P7A9A08
GLOSSY GOLD

Lapis cabinet side · Arm 9



P7SXA08SN
GLOSSY GOLD

Lapis door side



P7A0A07
OLD BRASS

Lapis cabinet side · Arm 0



P7A9A07
OLD BRASS

Lapis cabinet side · Arm 9



P7SXA07SN
OLD BRASS

Lapis door side



P7A0AA3
BLACK

Lapis cabinet side · Arm 0




P7A9AA3
BLACK

Lapis cabinet side · Arm 9




P7SXAA3SN
BLACK

Lapis door side

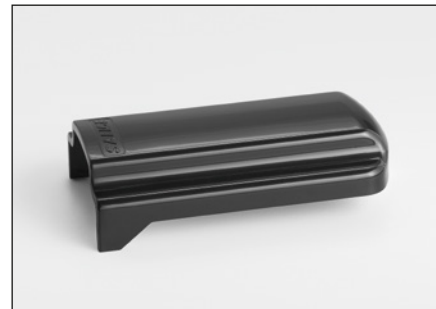


P7A0A11
MATT WHITE

Lapis cabinet side · Arm 0

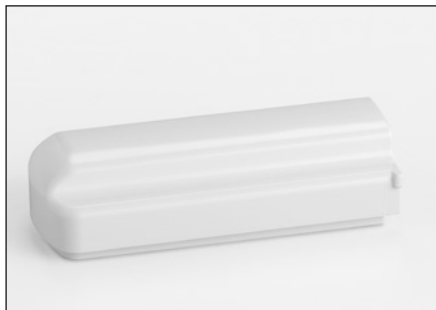

P7A9A11
MATT WHITE

Lapis cabinet side · Arm 9

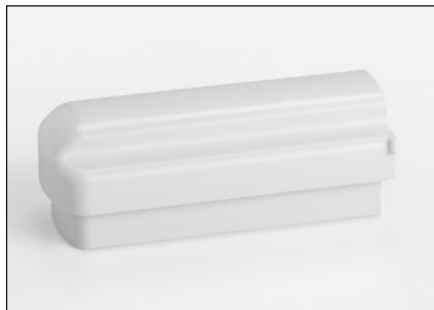

P7SXA11SN
MATT WHITE

Lapis door side



ARTURO SALICE S.p.A.

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424
FAX 031 791508
info.salice@salice.com
www.salice.com

DEUTSCHE SALICE GMBH

RUDOLF DIESEL STR. 10
POSTFACH 1154
74382 NECKARWESTHEIM
TEL. 07233 9807-0
FAX. 07233 9807-16
info.salice@deutschesalice.de
www.deutschesalice.de

SALICE UK LTD.

KINGFISHER WAY
HINCHINGBROOKE BUSINESS PARK
HUNTINGDON CAMBS PE 29 6FN
TEL. 01480 413831
FAX. 01480 451489
info.salice@saliceuk.co.uk
www.saliceuk.co.uk

DEUTSCHE SALICE GMBH

VERKAUFSBÜRO NORD
RINGSTRASSE 36/A30 CENTER
32584 LÖHNE
TEL. 05731 15608-0
FAX. 05731 15608-10
vknord@deutschesalice.de
www.deutschesalice.de

SALICE AMERICA INC.

2123 CROWN CENTRE DRIVE
CHARLOTTE NC. 28227
TEL. 704 8417810
FAX. 704 8417808
info.salice@saliceamerica.com
www.saliceamerica.com

SALICE FRANCE S.A.R.L.

ROUTE DE GOA ZAC LES 3 MOULINS
06600 ANTIBES
TEL. 0493 330069
FAX. 0493 330141
info.salice@salicefrance.com
www.salicefrance.com

SALICE CANADA INC.


4025 SLADEVIEW CRESCENT
UNIT # 7-9
MISSISSAUGA, ONTARIO L5L 5Y1
TEL. 905 8208787
FAX. 905 8207226
info.salice@salicecanada.com
www.salicecanada.com

SALICE ESPAÑA, S.L.U.

CALLE COPÉRNICO, 11
POLÍGONO INDUSTRIAL
COLL DE LA MANYA
08403 GRANOLLERS (BARCELONA)
TEL. 938 45 88 61
FAX 938 49 11 97
info.salice@saliceespana.es
www.saliceespana.es

SALICE CHINA (SHANGHAI) CO. LTD.

1st FLOOR, B1 BLDG 928 MINGZHU ROAD
XUJING, QINGPU DISTRICT
SHANGHAI 201702 - CHINA
Tel. 021 3988 9880
Fax 021 3988 9882
info.salice@salicechina.com
www.salicechina.com



Digital contents:

- **Technical pamphlet in Pdf format**
- **Presentation in Pdf format**
- **Video**

We reserve the right to change technical specifications without notice.
Lapis design: Arch. Giulio Manzoni